


# Rittal – The System.

Faster – better – everywhere.

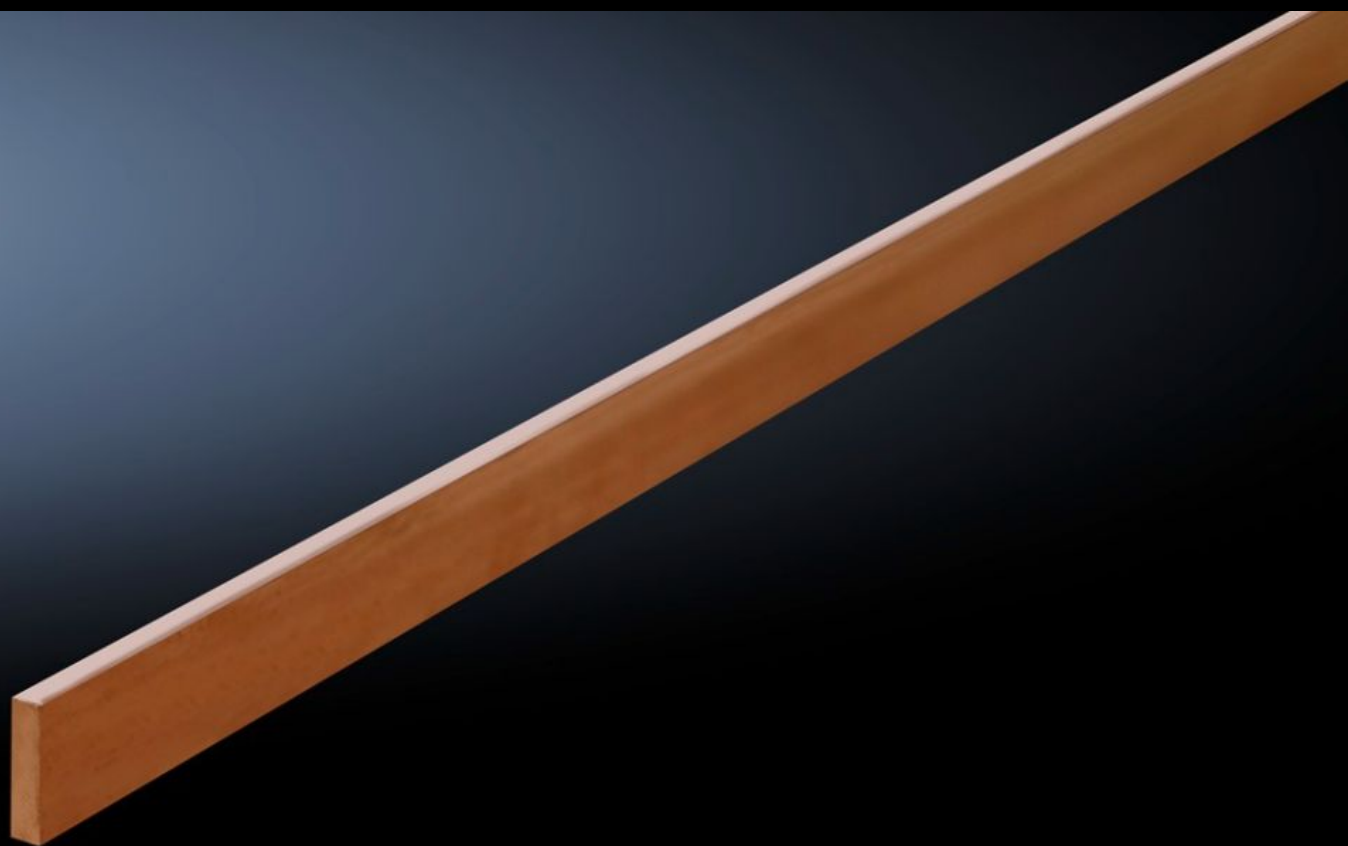

## SV 3584.000 Busbars E-Cu

State: 27.06.2024. (Source: [rittal.com/hr-hr](http://rittal.com/hr-hr))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# SV 3584.000 - Busbars E-Cu

Length: 2400 mm/bar.

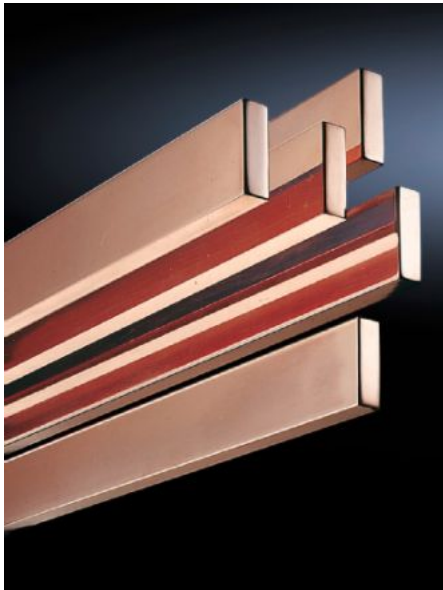

## Features

Model No.	SV 3584.000
Material	E-Cu F30
Length	2.400 mm
Note	May be cut individually to required length
Standards	DIN EN 13 601
Cross-section	Flat copper bar width: 30 mm Flat copper bar thickness: 5 mm
Packs of	6 pc(s).
Weight/pack	22,38 kg
Copper weight (kg per piece)	3.21
Customs tariff number	74071000
EAN	4028177044821
ETIM 8	EC001522
ETIM 7.0	EC001522

# Features

---

ECLASS 8.0

27370303

# Approvals

---

Approvals

UL + C-UL (listed)

Explanations

Declaration of conformity

Declaration of conformity UK

# Tender text

Busbar made from E-Cu

Busbars made from E-Cu to DIN 13601

Technical specifications

Length: 2400 mm

Dimension: 30 x 5mm

Cross section: 149 qmm

Weight: 1.30 Kg/m

Electrical parameters

IEC: to 447 A

UL 508: 350 A

System:

Rittal RiLine60