


Rittal – The System.

Faster – better – everywhere.

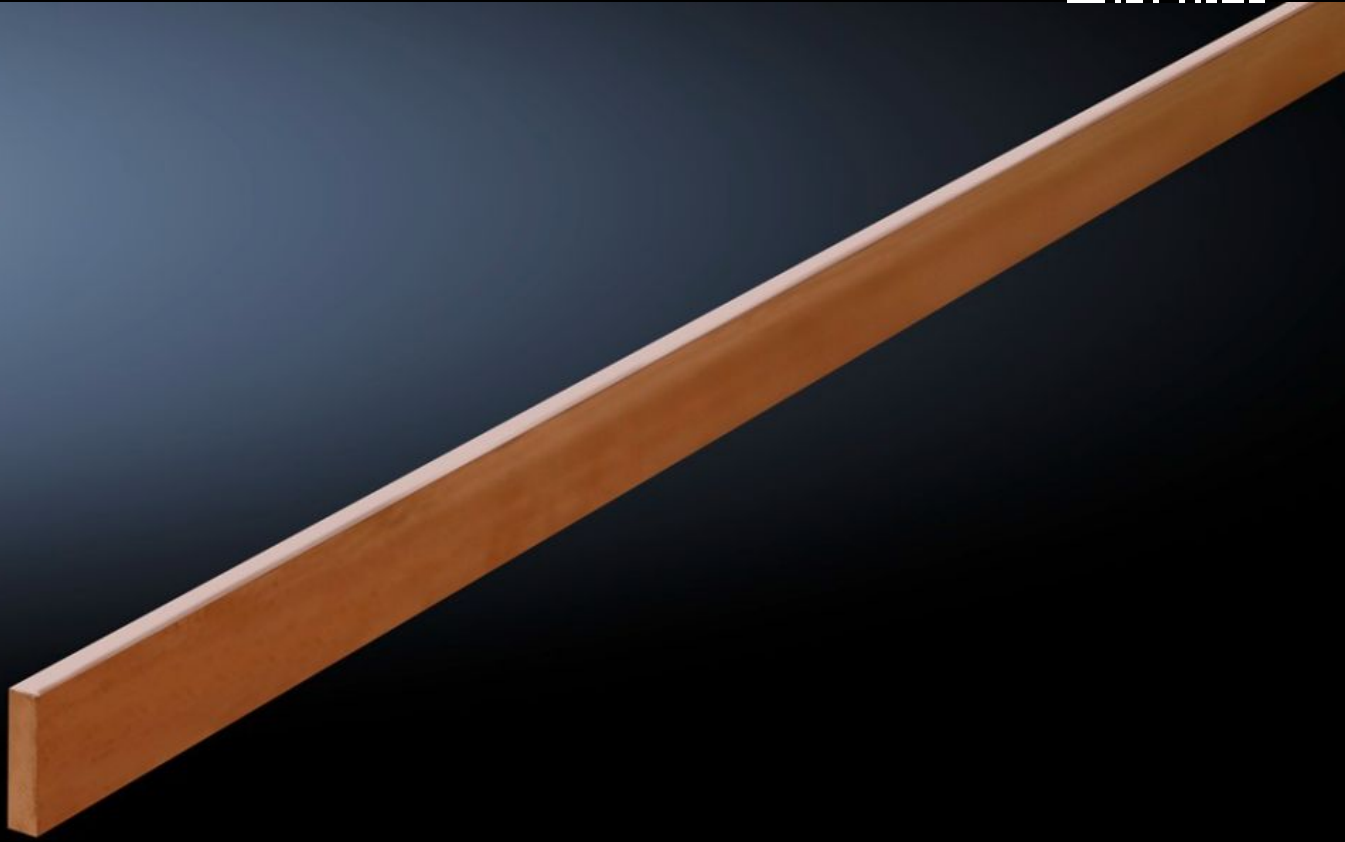

SV 3584.000 Busbars E-Cu

State: 13/07/2024 (Source: rittal.com/uae-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



SV 3584.000 - Busbars E-Cu

Length: 2400 mm/bar.

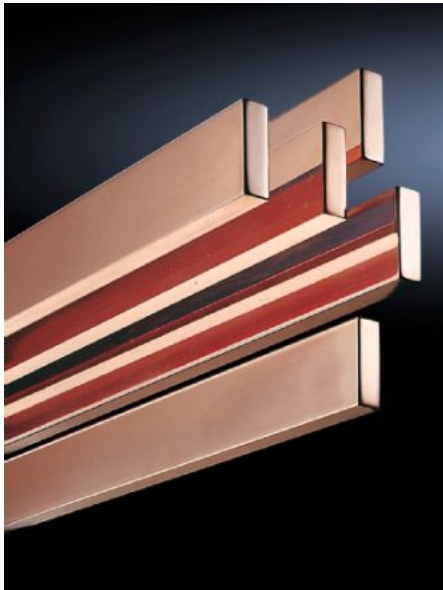

Features

| | |
|------------------------------|---|
| Model No. | SV 3584.000 |
| Material | E-Cu F30 |
| Length | 2,400 mm |
| Note | May be cut individually to required length |
| Standards | DIN EN 13 601 |
| Cross-section | Flat copper bar width: 30 mm Flat copper bar thickness: 5 mm |
| Packs of | 6 pc(s). |
| Weight/pack | 22.38 kg |
| Copper weight (kg per piece) | 3.21 |
| Customs tariff number | 74071000 |
| EAN | 4028177044821 |
| ETIM 8 | EC001522 |
| ETIM 7.0 | EC001522 |

Features

ECLASS 8.0

27370303

Approvals

Approvals

UL + C-UL (listed)

Explanations

Declaration of conformity

Declaration of conformity UK

Tender text

Busbar made from E-Cu

Busbars made from E-Cu to DIN 13601

Technical specifications

Length: 2400 mm

Dimension: 30 x 5mm

Cross section: 149 qmm

Weight: 1.30 Kg/m

Electrical parameters

IEC: to 447 A

UL 508: 350 A

System:

Rittal RiLine60